

# Network Layer

Routing in the Internet

# Intra-AS Routing


- Also known as Interior Gateway Protocols (IGP)
- Most common Intra-AS routing protocols:
  - RIP: Routing Information Protocol
  - OSPF: Open Shortest Path First
  - IGRP: Interior Gateway Routing Protocol (Cisco proprietary)

# Network Layer

RIP

# RIP ( Routing Information Protocol)

- Distance vector algorithm
- Included in BSD-UNIX Distribution in 1982
- Distance metric: # of hops (max = 15 hops)

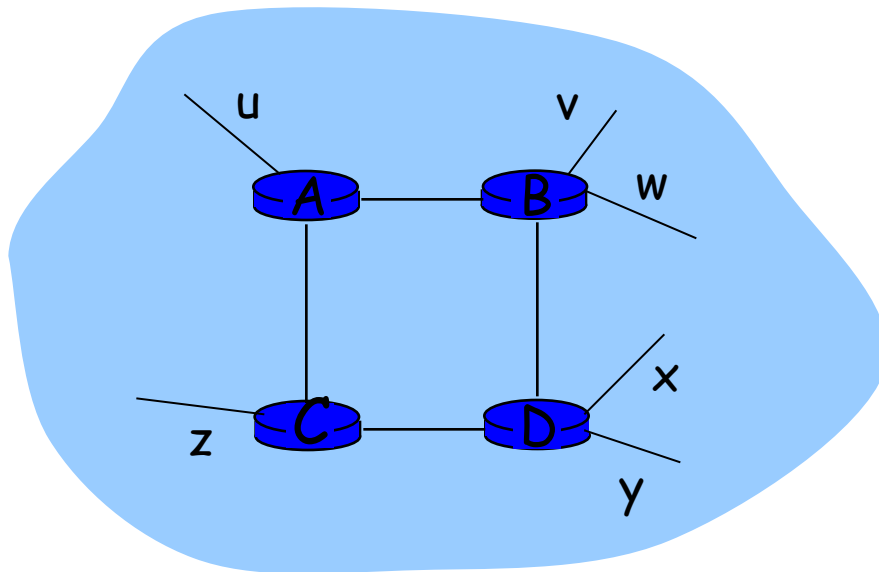


<u>destination</u>	<u>hops</u>
u	1
v	2
w	2
x	3
y	3
z	2

# RIP advertisements

- Distance vectors: exchanged among neighbors every 30 sec via Response Message (also called advertisement)
- Each advertisement: list of up to 25 destination nets within AS

# RIP: Example

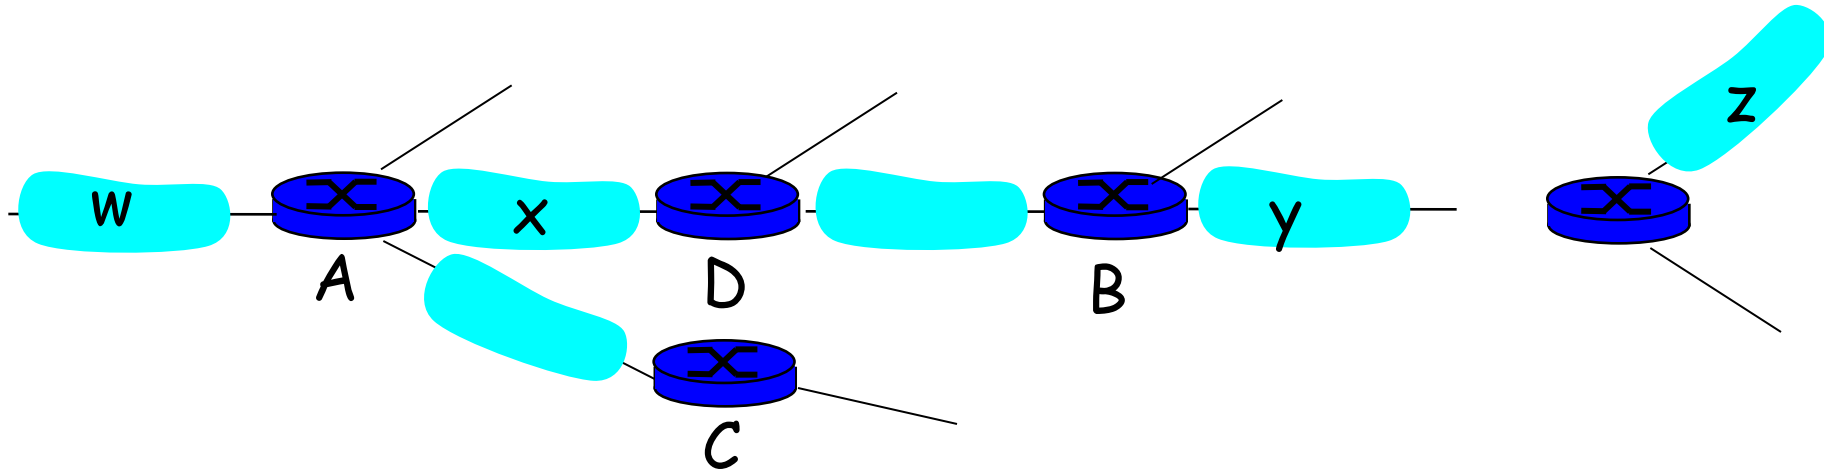


Destination Network	Next Router	Num. of hops to dest.
w	A	2
y	B	2
z	B	7
x	--	1
....	....	....

Routing table in D

# RIP: Example

Dest	Next	hops
w	-	-
x	-	-
z	C	4
....	...	...

Advertisement  
from A to D

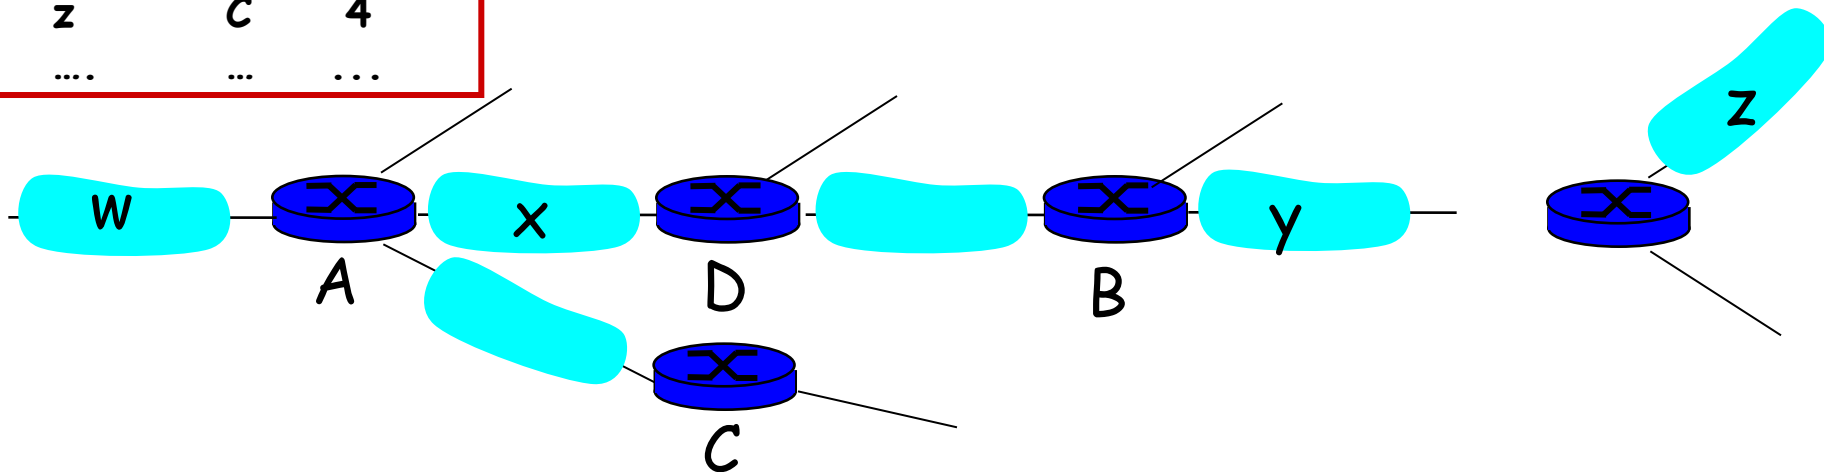

Destination Network	Next Router	Num. of hops to dest.
w	A	2
y	B	2
z	<del>B</del> A	<del>7</del> 5
x	--	1
....	....	....

Routing table in D

# RIP: Link Failure and Recovery


If no advertisement heard after 180 sec -->  
neighbor/link declared dead

- routes via neighbor invalidated
- new advertisements sent to neighbors
- neighbors in turn send out new advertisements (if tables changed)
- link failure info quickly propagates to entire net
- poison reverse used to prevent ping-pong loops (infinite distance = 16 hops)




# RIP Table processing

- RIP routing tables managed by **application-level** process called route-d (daemon)
- advertisements sent in UDP packets, periodically repeated

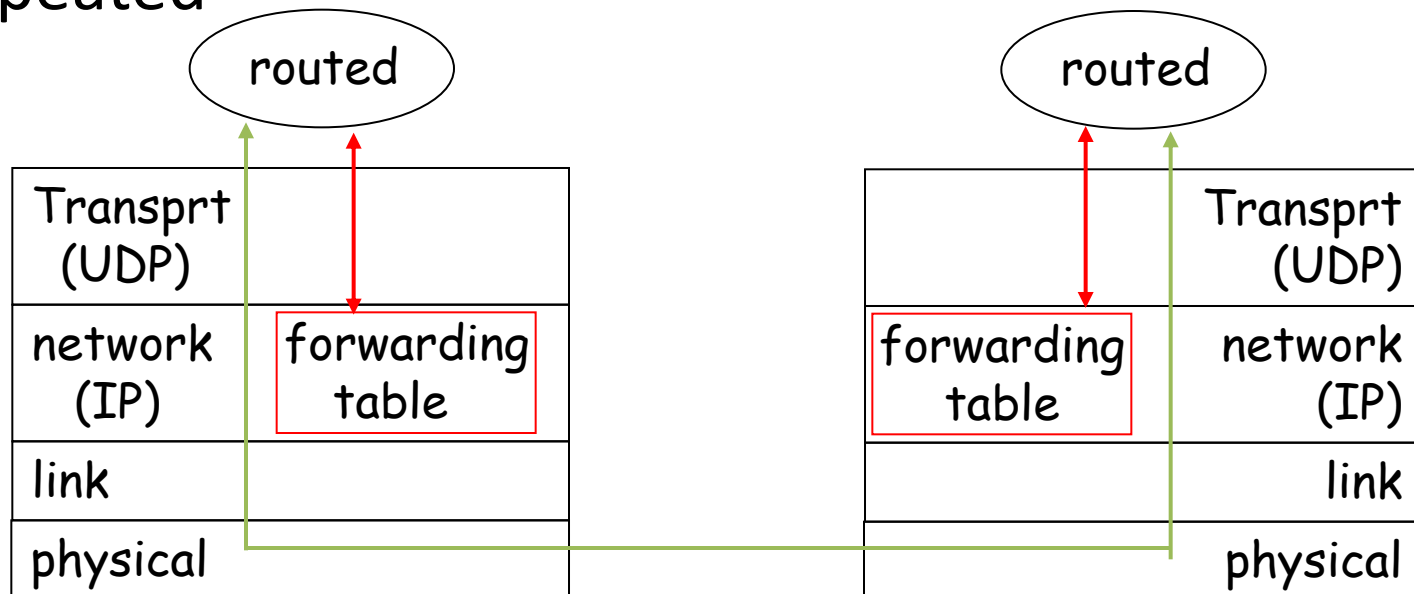


# Two-Node Instability



Before failure

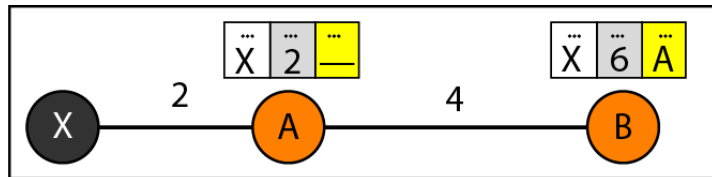

After failure

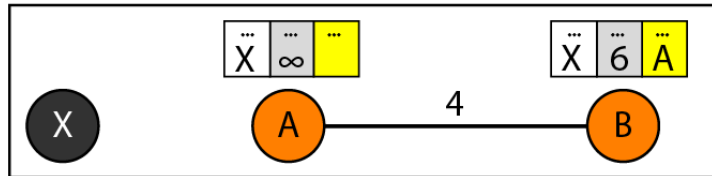


After A receives update from B

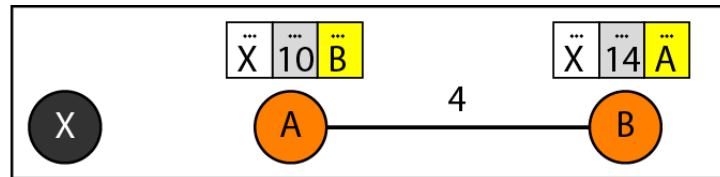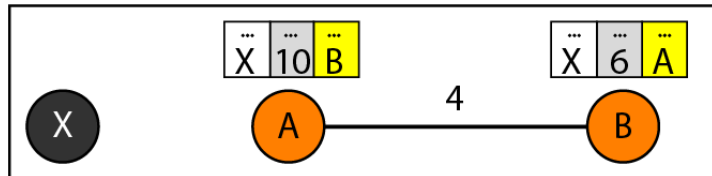

After B receives update from A

⋮

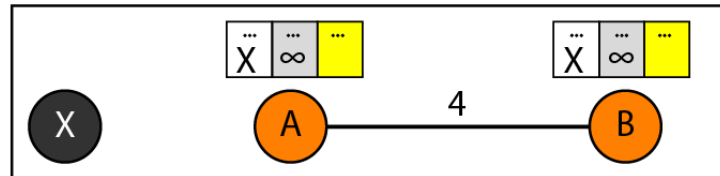

Finally

# Network Layer

OSPF


# OSPF (Open Shortest Path First)

- “open”: publicly available
- Uses Link State algorithm
  - LS packet dissemination
  - Topology map at each node
  - Route computation using Dijkstra’s algorithm
- OSPF advertisement carries one entry per neighbor router
- Advertisements disseminated to entire AS (via flooding)
  - Carried in OSPF messages directly over IP (rather than TCP or UDP)

# OSPF “advanced” features (not in RIP)

- Security: all OSPF messages authenticated (to prevent malicious intrusion)
- Multiple same-cost paths allowed (only one path in RIP)
- For each link, multiple cost metrics for different TOS (e.g., satellite link cost set “low” for best effort; high for real time)
- Integrated uni- and multicast support:
  - Multicast OSPF (MOSPF) uses same topology data base as OSPF
- Hierarchical OSPF in large domains.

# Hierarchical OSPF

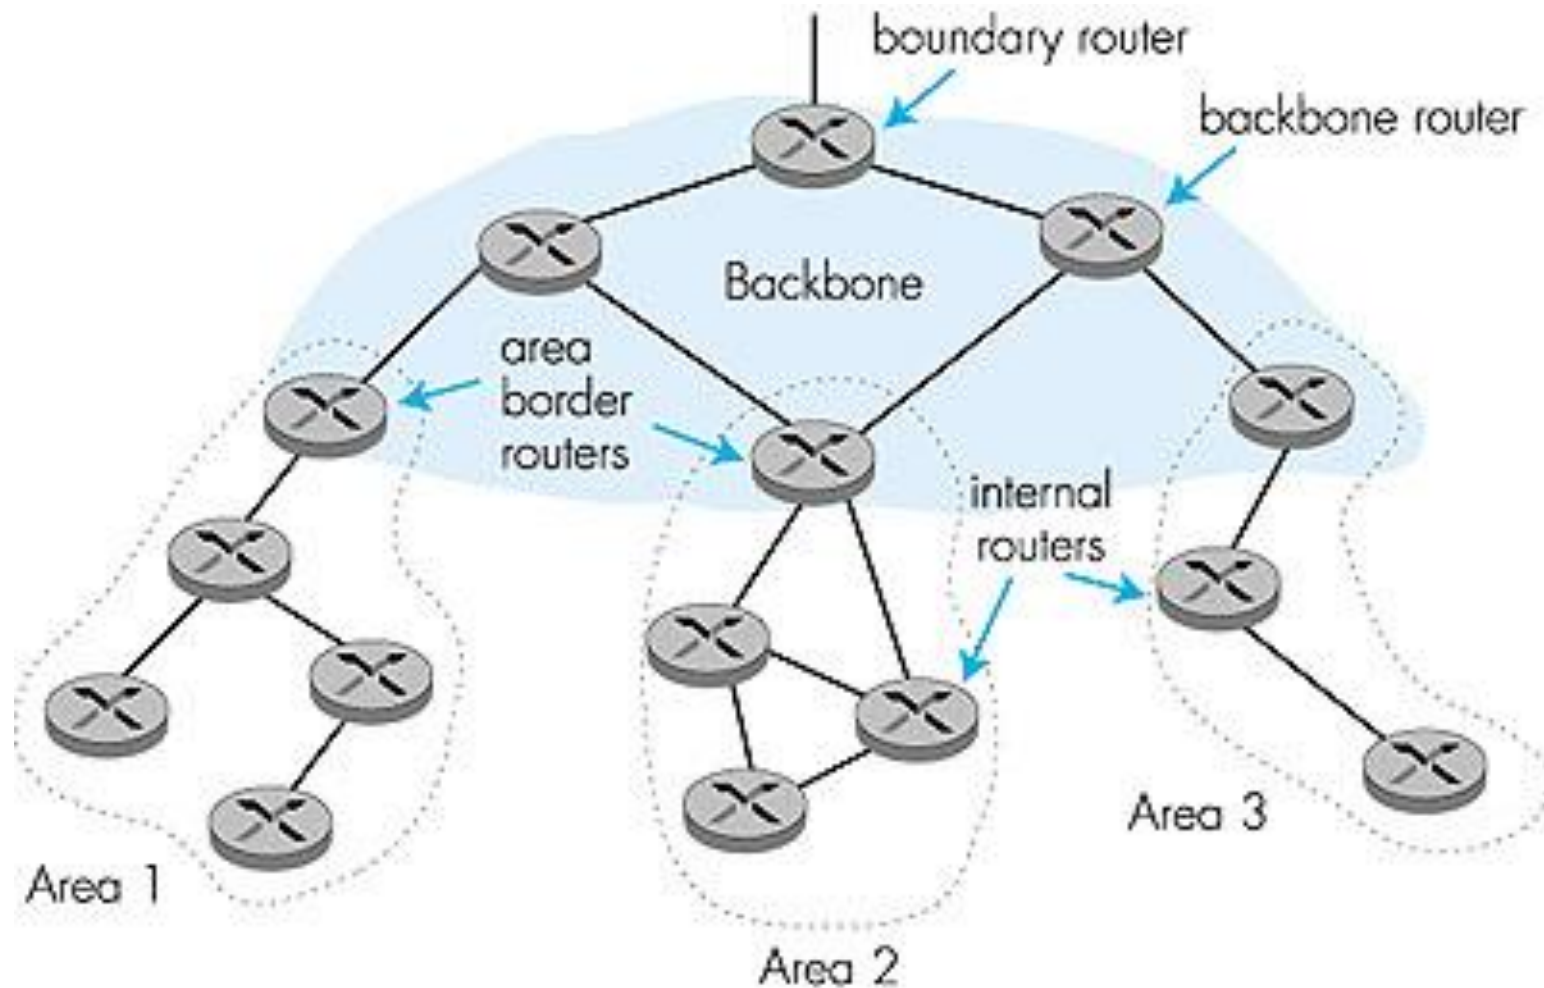

# Hierarchical OSPF

- Two-level hierarchy: local area, backbone.
  - Link-state advertisements only in area
  - each nodes has detailed area topology; only know direction (shortest path) to nets in other areas.
- **Area border routers:** “summarize” distances to nets in own area, advertise to other Area Border routers.
- **Backbone routers:** run OSPF routing limited to backbone.
- **Boundary routers:** connect to other AS's.

# Network Layer

BGP




# Internet inter-AS routing: BGP

- BGP (Border Gateway Protocol): *the* de facto standard
- BGP provides each AS a means to:
  1. Obtain subnet reachability information from neighboring ASs.
  2. Propagate the reachability information to all routers internal to the AS.
  3. Determine “good” routes to subnets based on reachability information and policy.
- Allows a subnet to advertise its existence to rest of the Internet: *“I am here”*


# BGP basics

- Pairs of routers (BGP peers) exchange routing info over semi-permanent TCP conctns: BGP sessions
- Note that BGP sessions do not correspond to physical links.
- When AS2 advertises a prefix to AS1, AS2 is *promising* it will forward any datagrams destined to that prefix towards the prefix.
  - AS2 can aggregate prefixes in its advertisement

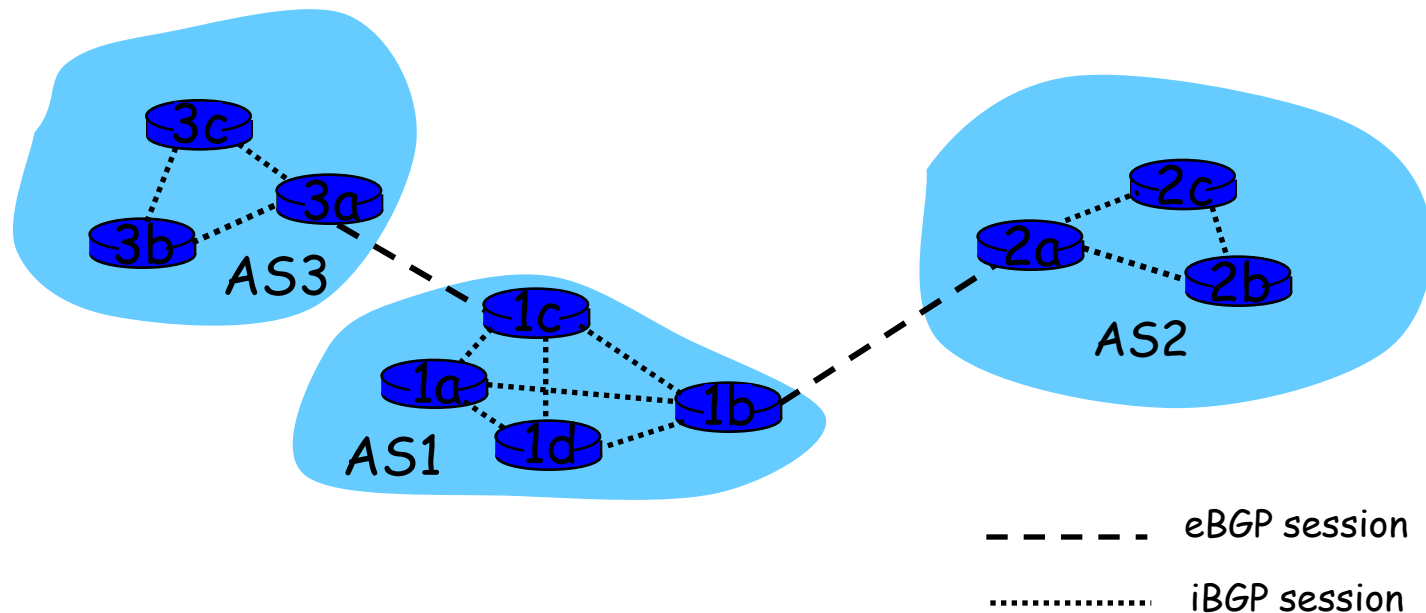

# Distributing reachability info

- With eBGP session between 3a and 1c, AS3 sends prefix reachability info to AS1.
- 1c can then use iBGP to distribute this new prefix reach info to all routers in AS1
- 1b can then re-advertise the new reach info to AS2 over the 1b-to-2a eBGP session
- When router learns about a new prefix, it creates an entry for the prefix in its forwarding table.

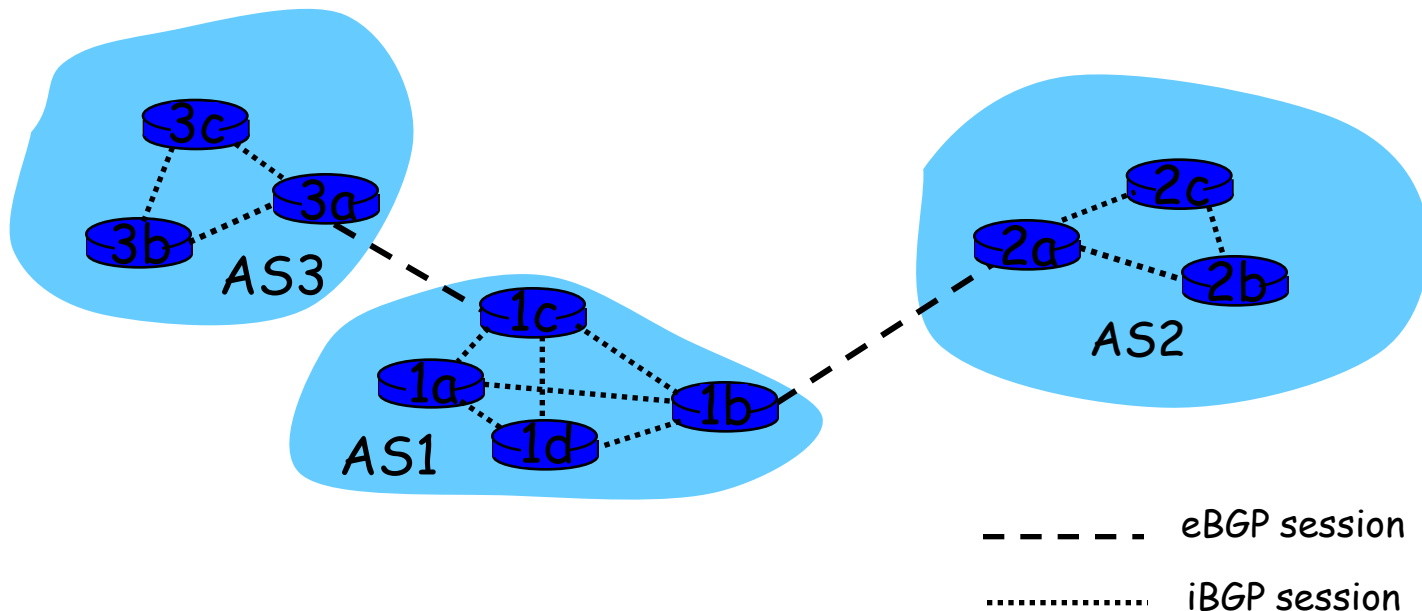

# Path attributes & BGP routes

- When advertising a prefix, advert includes BGP attributes.
  - prefix + attributes = “route”
- Two important attributes:
  - AS-PATH: contains the ASs through which the advert for the prefix passed: AS 67 AS 17
  - NEXT-HOP: Indicates the specific internal-AS router to next-hop AS. (There may be multiple links from current AS to next-hop-AS.)
- When gateway router receives route advert, uses import policy to accept/decline.


# BGP route selection

- Router may learn about more than 1 route to some prefix. Router must select route.
- Elimination rules:
  1. Local preference value attribute: policy decision
  2. Shortest AS-PATH
  3. Closest NEXT-HOP router: hot potato routing
  4. Additional criteria

# BGP messages


- BGP messages exchanged using TCP.
- BGP messages:
  - OPEN: opens TCP connection to peer and authenticates sender
  - UPDATE: advertises new path (or withdraws old)
  - KEEPALIVE keeps connection alive in absence of UPDATES; also ACKs OPEN request
  - NOTIFICATION: reports errors in previous msg; also used to close connection

# BGP routing policy

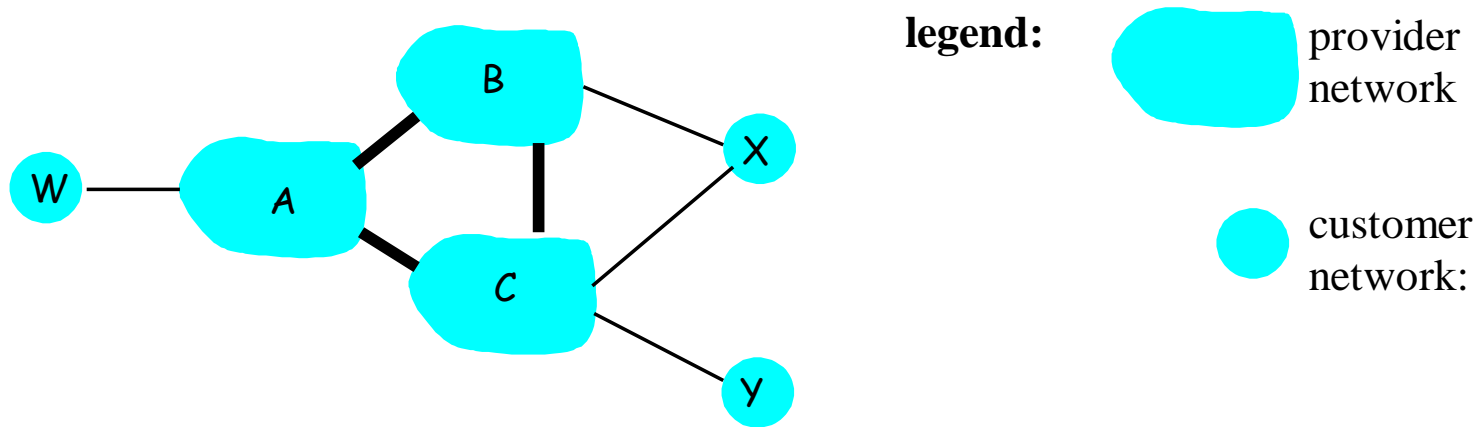

- A,B,C are provider networks
- X,W,Y are customer (of provider networks)
- X is dual-homed: attached to two networks
  - X does not want to route from B via X to C
  - .. so X will not advertise to B a route to C

# BGP routing policy (2)

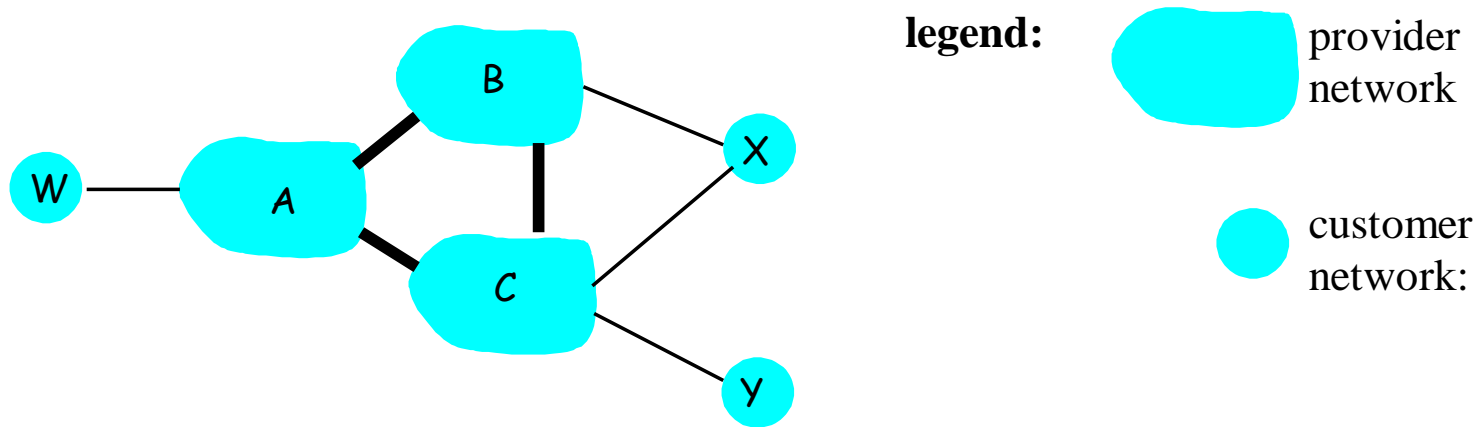

- A advertises to B the path *AW*
- B advertises to X the path *BAW*
- Should B advertise to C the path *BAW*?
  - No way! B gets no “revenue” for routing *CBAW* since neither W nor C are B’s customers
  - B wants to force C to route to w via A
  - B wants to route *only* to/from its customers!



# Why different Intra- and Inter-AS routing ?

## Policy:

- Inter-AS: admin wants control over how its traffic routed, who routes through its net.
- Intra-AS: single admin, so no policy decisions needed

## Scale:

- hierarchical routing saves table size, reduced update traffic

## Performance:

- Intra-AS: can focus on performance
- Inter-AS: policy may dominate over performance